




WARNING LABEL EMBEDDED INTO CONCRETE COVER READS AS FOLLOWS:

CAUTION:
DO NOT ENTER WITHOUT PROPER VENTILATION.
COULD CAUSE DEATH...DANGEROUS GAS.

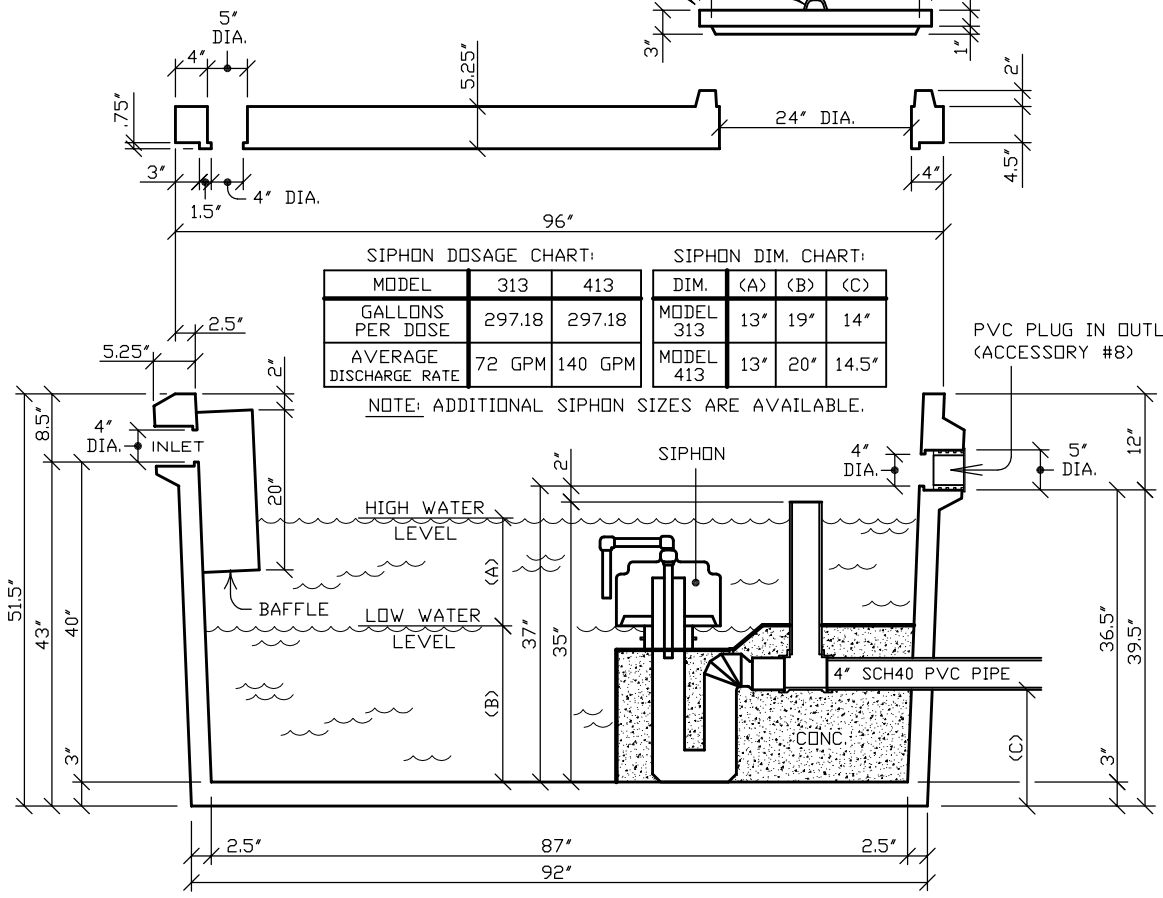

29" DIAMETER CONCRETE COVER (TYPICAL)
SEE "ACCESSORIES" FOR OTHER COVER OPTIONS

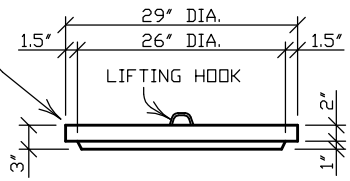


SIPHON DOSAGE CHART:			SIPHON DIM. CHART:			
MODEL	313	413	DIM.	(A)	(B)	(C)
GALLONS PER DOSE	297.18	297.18	MODEL 313	13"	19"	14"
AVERAGE DISCHARGE RATE	72 GPM	140 GPM	MODEL 413	13"	20"	14.5"


NOTE: ADDITIONAL SIPHON SIZES ARE AVAILABLE.

SECTION
(TANK BASE, TOP, & COVER)

GAL. PER INCH = 22.6
LIQUID CAP. = 846 GAL.
MAX. LIQUID CAP. = 914 GAL.
(BELOW INLET)

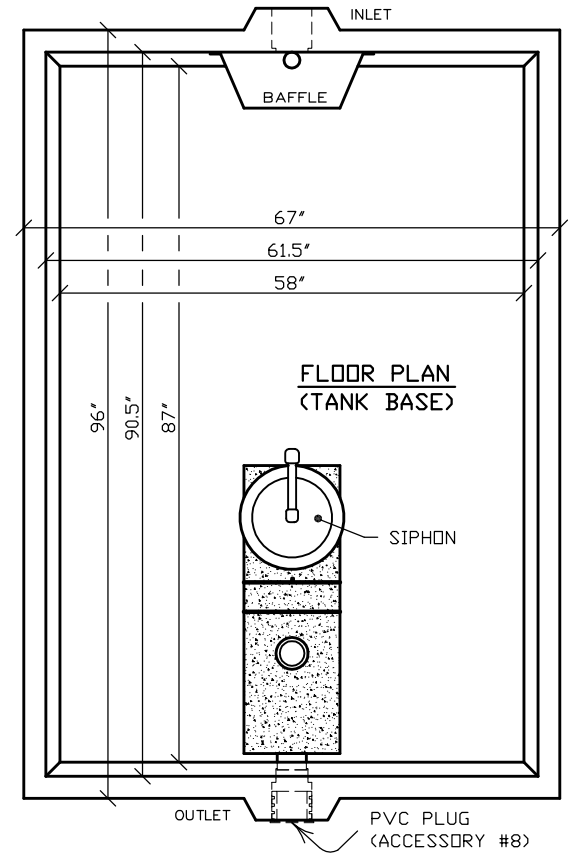

FLOOR PLAN
(TANK BASE)

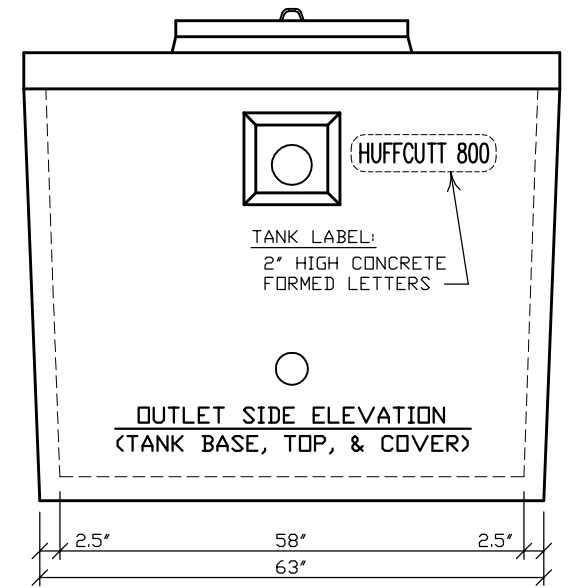

OUTLET SIDE ELEVATION
(TANK BASE, TOP, & COVER)

N.P.C.A. CERTIFIED PLANT
&
MEMBER OF:
NATIONAL & WISCONSIN PRECAST CONCRETE ASSOCIATIONS

THIS DRAWING SHALL NOT BE COPIED OR SUBMITTED TO OTHERS WITHOUT THE CONSENT OF THIS COMPANY.

HUFFCUTT CONCRETE, INC. 4154 123rd STREET
CHIPPEWA FALLS, WI 54729
(715) 723-7446 * FAX (715) 723-7111 * (800) 924-1516 * www.huffcutt.com

TANK:
800 GAL. LOW PROFILE
WITH SIPHON
(PUMP, SEPTIC, DR HOLD)